

Tilting bratt pan, Durapan gas open base. 120 litre capacity.

STANDARD FEATURES

- Anti-Splash Pouring Lip
- Electronic Spark Ignition
- All Controls are serviceable from the front of the unit
- High Limit Safety Device set at 246°C
- Stainless Steel Clad 16mm Cooking Surface Guaranteed against warping
- Stainless Steel Coved Cornered Pans with Litre Markings
- All Stainless Steel Construction for durability and easy cleaning
- Adjustable, Electronic Thermostat controls temperature from 37°C to 218°C
- High Efficiency Heating System with even heat distribution
- Fast Heat-Up and Recovery Time-Preheats in 11 minutes, full capacity from cold to boiling in 60 minutes
- Spring Assist Cover with Adjustable Vent and Full Width Handle
- On/Off Switch, Thermostat Knob and Pilots, recessed to avoid breakage
- Four Stainless Steel, Level adjustable feet, rear flanged for bolting
- Two pilot lights; Green = Power on, Amber = Temperature Cycling
- Splash Proof Controls and Water Tight Electrical Connections

OPTIONAL FEATURES

- Power Tilt with Hand Tilt Override (PT1)
- Food Strainers for pouring spout (FS)
- Vegetable Steamers (VS)
- Poaching Pans (PP)
- Sliding Drain Drawer with Splash Screen (SLD)
- Double Pantry Faucet (DPK14), includes Faucet Mounting Bracket
- Tangent draw-off valve 51mm (TD2SK)



TECHNICAL DATA

- External: 915W x 940D x 1067H mm
- Clearance: 153mm Rear, 115mm Right Side (for Faucet)
- Power Supply: 1NAC 240V, 1 Phase, 0.83 amp (1.6m Cable & Plug included)
- Gas Consumption: 80.5mj (NG), 87.5mj (Propane)
- Gas Connection: 3/4"
- Capacities (per kettle):
(in 115 gram servings, other sizes may be calculated)
30 gallons / 120 litres - 960 servings
- AGA Approval no.: AGA SC404G

SHIPPING DATA

- Shipping Weight: 228 kg
- Shipping Dimensions: 1117W x 1117D x 1372H mm







SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

CODING GUIDE FOR OPTIONS

- OPT5 Power Tilt
 - OPT10 Sliding Drain Drawer
- *add OPT suffix to product code.

DIMENSIONS

MODEL	A	B	C	G
SGL-30-TR	915mm	812mm	229mm	835mm

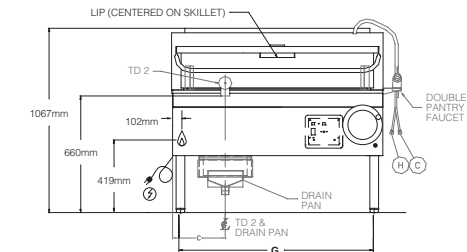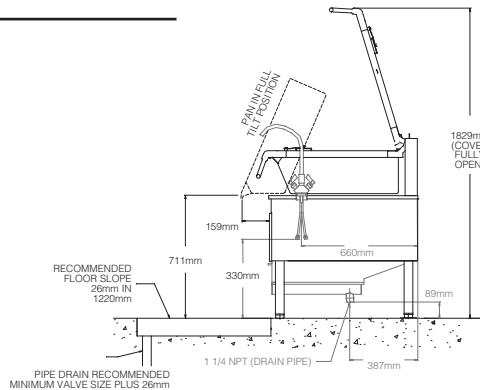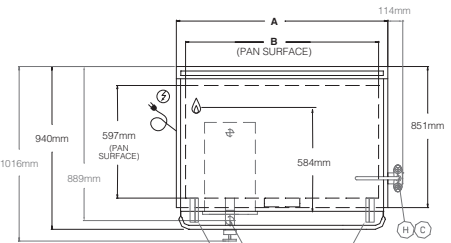

NOTE: NON STANDARD ITEMS ARE SHOWN IN GRAY